


Murobello

FINE QUARTZ ACRYLIC
PAINT FOR OUTDOORS

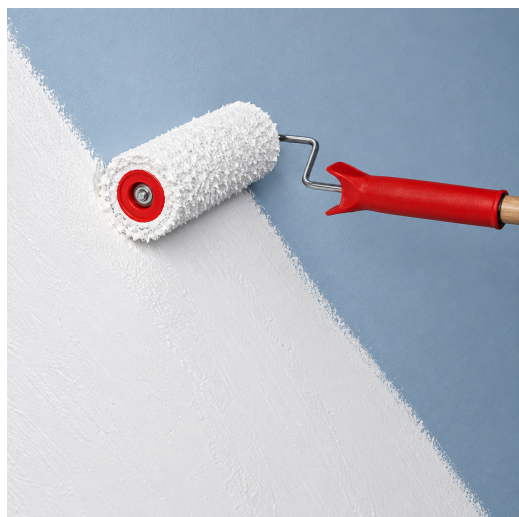

DESCRIPTION

Water-based paint composed of synthetic resins in aqueous dispersion, refined mineral fillers, special pigments and additives for easy application. Apply by brush, roller or spray for excellent coverage on outdoor facades. The dried coating has strong adhesion and good abrasion resistance. Its components provide resistance to weathering, mould and algae formation, dirt and ageing. Permeable to water vapour.

USE

For decorating facades of residential and commercial buildings. Suitable for new cement substrates or repainting sound surfaces. On old paint or unsound substrates, first apply a consolidating primer such as PRIMER SOL. Also suitable for creating thick decorative finishes.

SPECIFICATIONS

Paint outdoor cement surfaces with an extra-white, washable, breathable fine quartz paint with high covering ability (such as MUROBELLO by COLMEF S.r.l.). Apply in at least two coats.

TECHNICAL DATA

Appearance	Thick paste
Colour	Opaque white
Other colours	See colour chart
Specific weight*	1.55
Solid residue	65%
Brookfield viscosity	20000 cP·s
Application temperature	+5°C to +35°C
Surface drying time	Around 30 min at +23°C
Waiting time between coats	2 hours
Ageing resistance	Excellent
Coverage per coat	6.5 - 7 m ² /litre

PACKAGING

14 litre bucket
33 buckets per pallet

4 litre bucket
64 buckets per pallet

*Source lists g/cm³ for specific weight; unit requires confirmation.

Tests performed at 23°C and 50% R.H. in the absence of air ventilation.